

Fig. 2

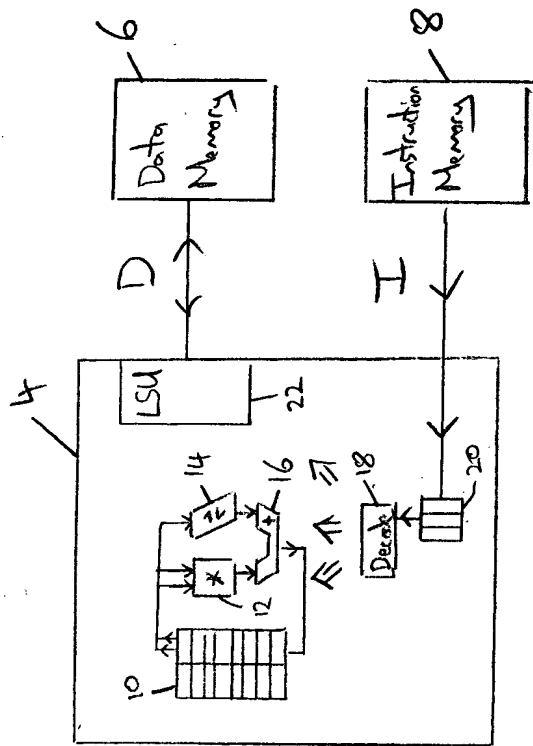


Fig. 1



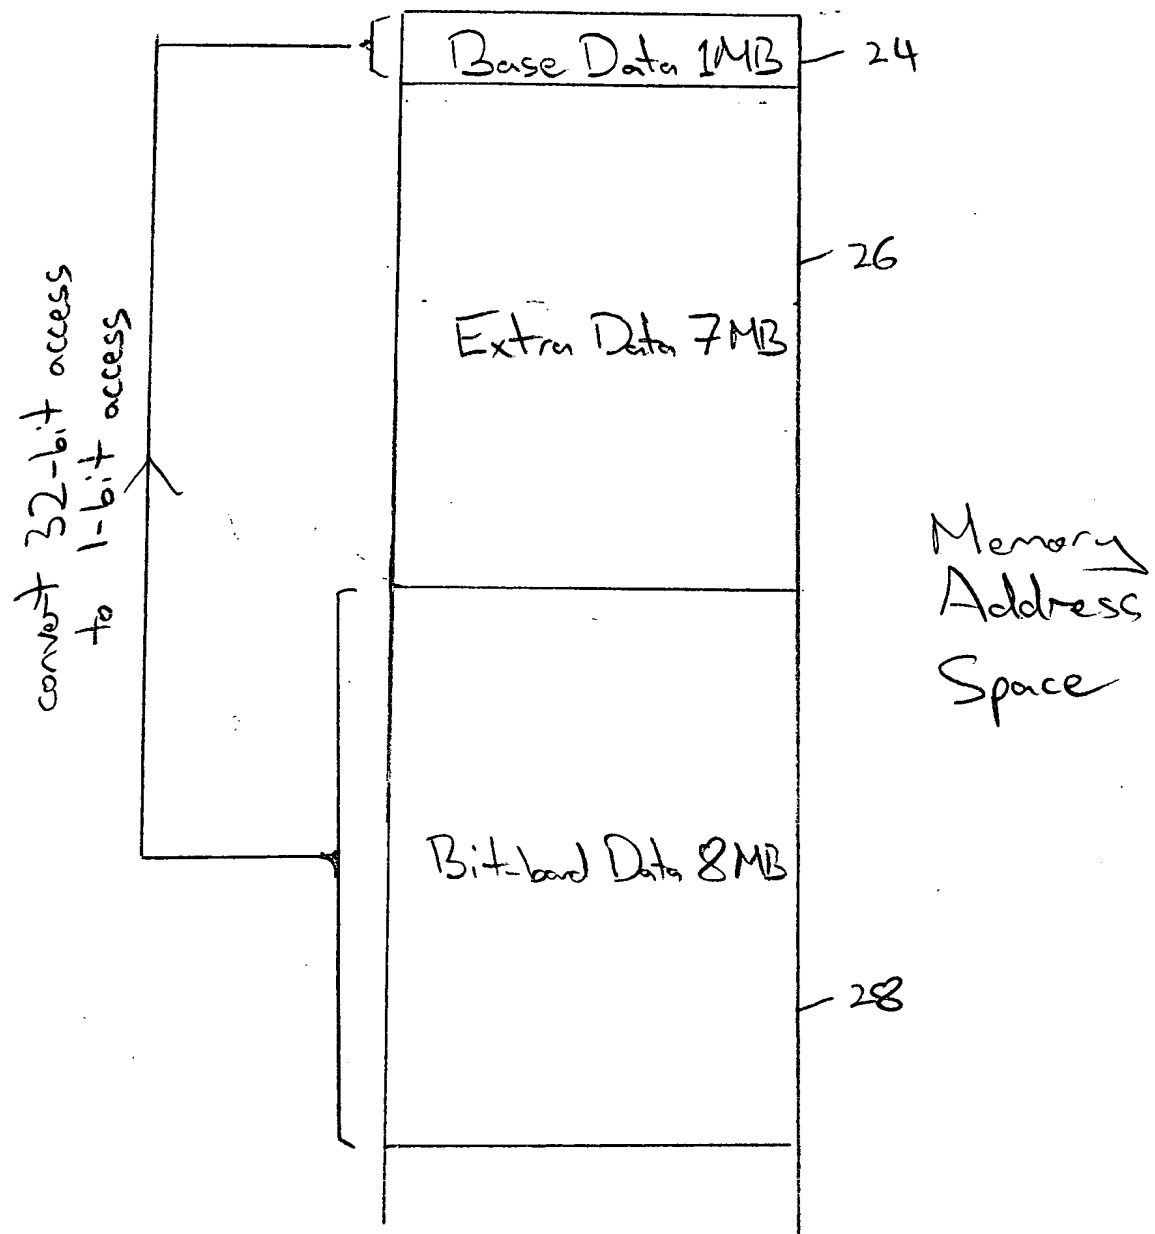


Fig. 2

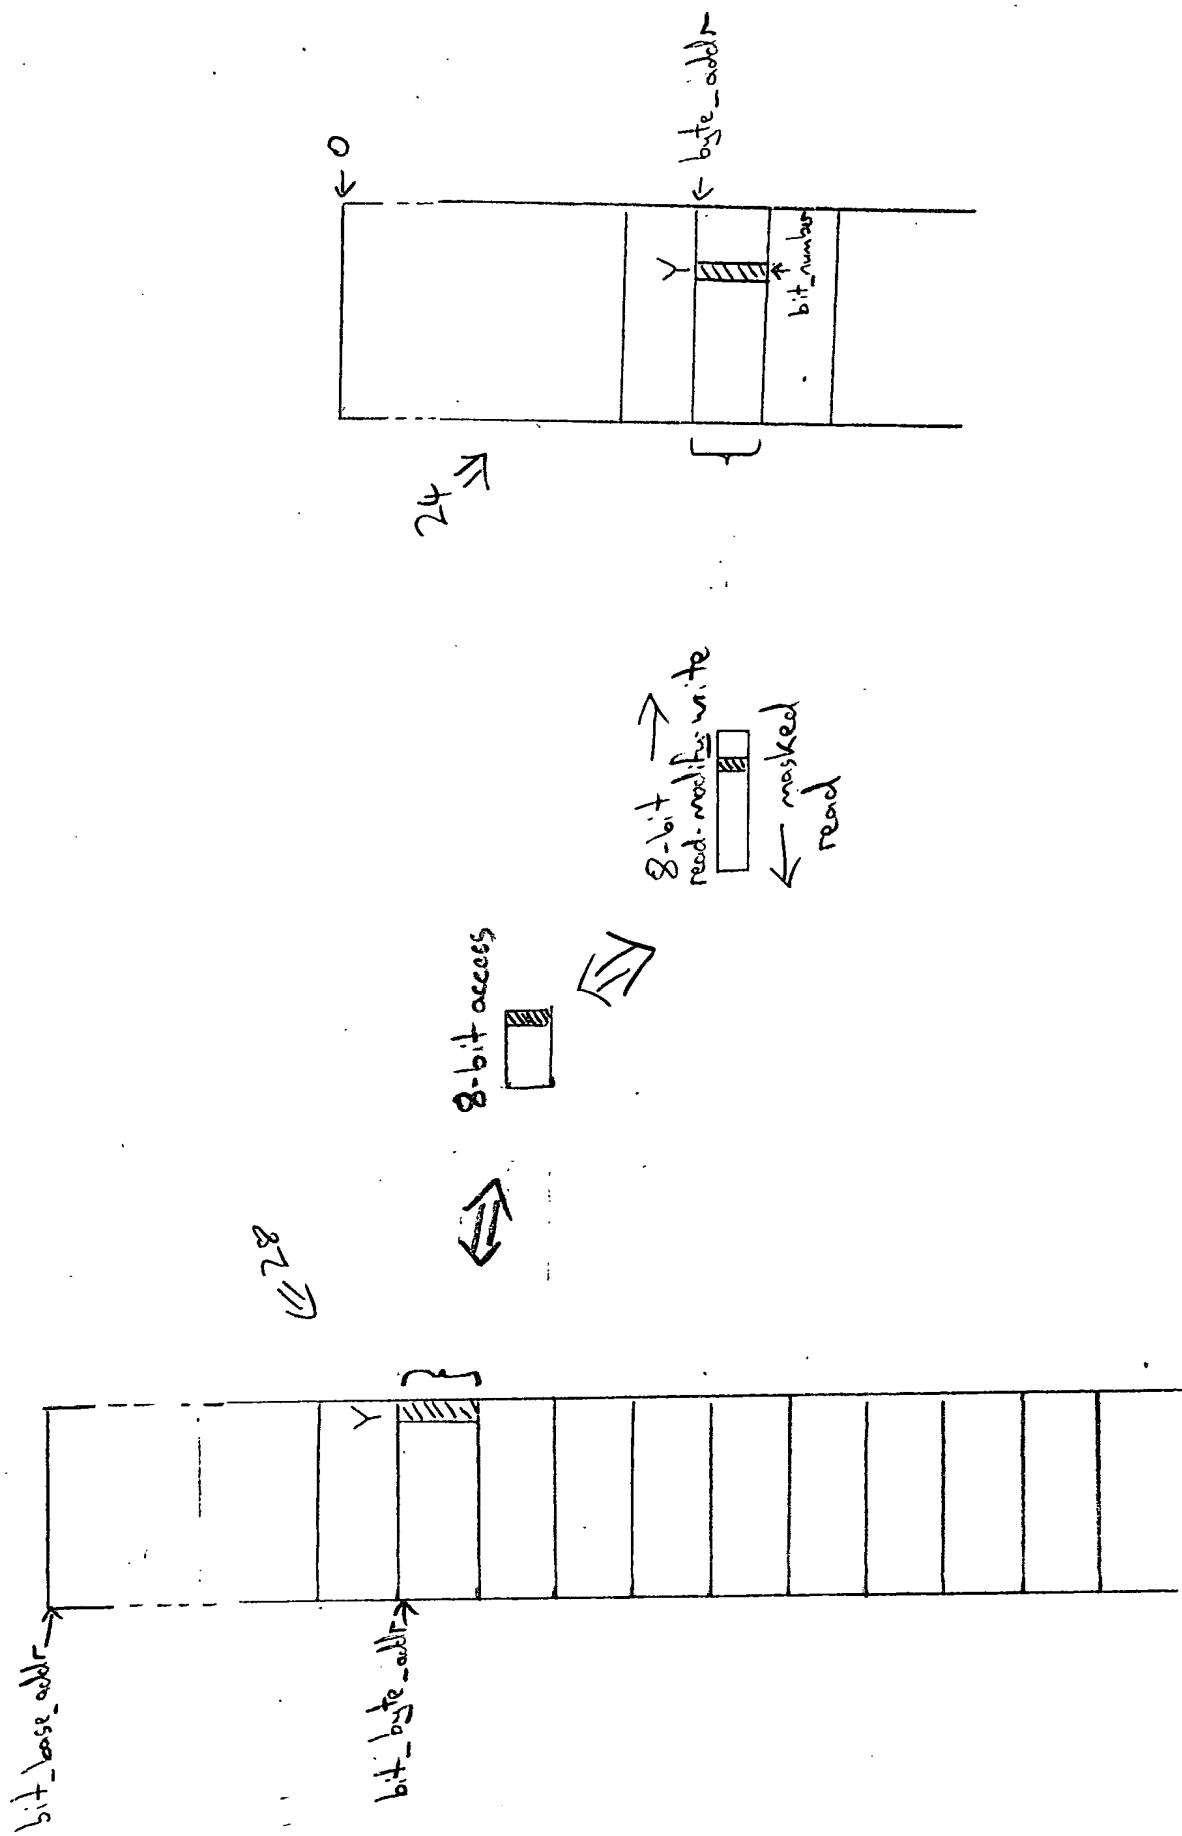

$$\text{bit_byte_addr} = \text{bit_base_addr} + (\text{byte_addr} * 8) + \text{bit_number}$$

Fig. 3

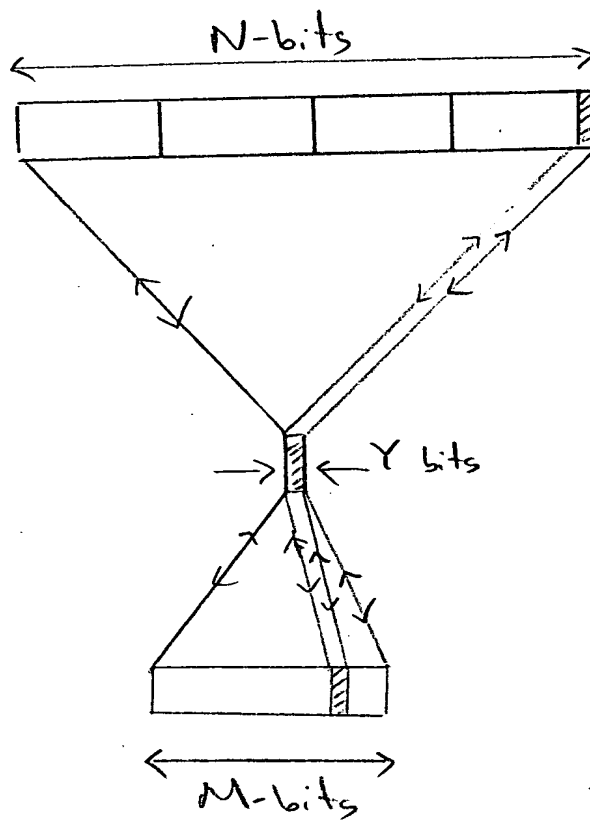

First data value

second data value

Fig. 4